

4600 Series RAID-Enabled Industrial PCs

DS-RAID46(A)



FEATURES

- 12.1" SVGA or 15.0" XGA TFT color flat panels/ or No Display options
- Choice of operator inputs:
 - ♦ Reprogrammable keypad with integrated mouse (KPM);
 - ♦ Touchscreen only (T);
 - ♦ Combination of all 3 (KPMT);
 - ♦ Or / No optional input (1546)
- Intel® Celeron® M 1.3 GHz, 512K cache, 400 MHz system bus (optional Pentium M 2.0 GHz, 2M cache, 533 MHz system bus)
- 512 MB DRAM (up to 2 GB optional)
- Dual 40 GB minimum Serial ATA hard drive
- RAID (level 1)
- 4XAGP graphics with 32 MB video memory (shared with system memory)
- Four available expansion slots:
 - ♦ One (8.0" max.) PCI expansion slot;
 - ♦ Two (9.0" max.) PCI expansion slots;
 - ♦ One (9.0" max.) ISA or PCI expansion slot
- Dual 2.5" hard drives, with a total storage space of 20 GB
- 10/100 and 10/100/1000 BaseT Ethernet ports
- USB 1.1 compliant ports (one additional 1.1 compliant port on front of KPM units)
- UL, cUL, CE approvals
- UL listed for hazardous locations: Class I Division 2, Groups A, B, C, D; Class II Division 2, Groups F and G
- Windows® XP or 2000 operating systems
- 100-240 VAC power supply
- 2-year warranty included

The most susceptible component of any Industrial PC is the hard drive. Some sources suggest shock mounting the hard drive; unfortunately, shock mounting may cause the hard drive to become more vibration-sensitive at certain frequencies. The most common method to overcome a susceptibility to vibration is through the use of solid-state storage media or the use of redundant hard drives.

Many of Xycom Automation's Heavy-Duty Industrial PCs offer solid-state media in the form of CompactFlash or solid state hard drives. While many storage sizes are available, the cost increases drastically as the required size increases.

Another approach is to use RAID-enabled PC. RAID stands for Redundant Array of Independent Disks. In essence, RAID is two or more hard disks attached to the same controller, either SCSI or IDE. The RAID controller can "stripe" or "mirror" data.

Striping (RAID 0) is used to read and write to many disks at once to increase hard drive performance, while Mirroring (RAID 1) allows the same data to be available on two drives. Other RAID levels (2 and higher) are also available. These higher levels increase the number of disks being utilized.

In a RAID 1 system there is a primary and a secondary hard drive.


- The RAID controller writes to both drives but only reads from the primary drive. If the RAID controller detects any problem with the primary drive it switches over to the secondary drive (which has an exact copy of all data on the primary drive) and utilizes it as the primary drive. The PC will continue to run allowing time to change the faulty hard drive without interruption in machine operation. Once the drive has been replaced the RAID controller automatically begins creating a mirror copy of the good drive. This process runs in the background while the machine operation is maintained. Once this new drive is operational it is recommended that the other drive be scheduled for replacement.
- The 1546 and 4600 series products can be factory configured with a RAID 1 implementation. These RAID-enabled configurations come standard with two easily removable Serial

ATA hard drives and a built in RAID controller. This creates a more robust, fault tolerant system to help maintain your machine operation and production. When utilized correctly a RAID-enabled industrial PC can greatly improve the overall reliability of an application.



PRODUCT DIMENSIONS AND CONFIGURATIONS


4612T

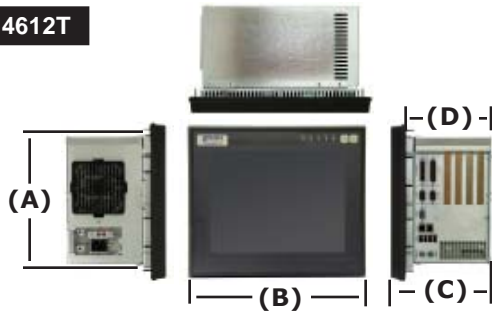

4612 Unit Dimensions

Model	4612T	4612KPM(T)
Height (A)	11.00" (279.4 mm)	12.45" (316.2 mm)
Width (B)	13.00" (330.2 mm)	16.70" (424.2 mm)
Depth (C)	7.4" (187.0 mm)	7.4" (187.0 mm)
Mounting Depth (D)	6.32" (160.5 mm)	6.36" (161.5 mm)
Weight	22 lbs (10 kg)	24 lbs (10.9 kg)


4612KPM(T)

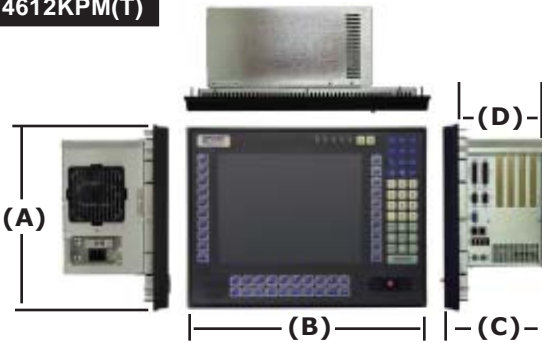

4612 Configurations

Display	12.1" LCD color display, 800 x 600 (SVGA), 300 nits
Operator Input	Analog resistive touchscreen (4612T) Reprogrammable 74-position keypad and industrial mouse (Touchscreen optional) (4612KPM(T))
Processors	Intel® Celeron® M 1.31 GHz or optional Pentium M
Preloaded OS	Windows® XP or Windows® 2000 (multi-language)
Expansion	One (8.0" max.) PCI, two (9.0" max.) PCI, and one (9.0" max.) PCI or ISA


4615T

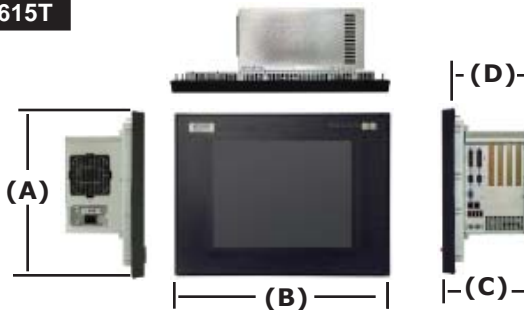

4615 Unit Dimensions

Model	4615T	4615KPM(T)
Height (A)	12.62" (320.5 mm)	13.97" (354.8 mm)
Width (B)	16.59" (421.4 mm)	19.00" (482.6 mm)
Depth (C)	7.59" (192.8 mm)	7.64" (194.0 mm)
Mounting Depth (D)	6.59" (167.4 mm)	6.60" (167.6 mm)
Weight	25 lbs (11.34 kg)	27 lbs (12.4 kg)

4615KPM(T)

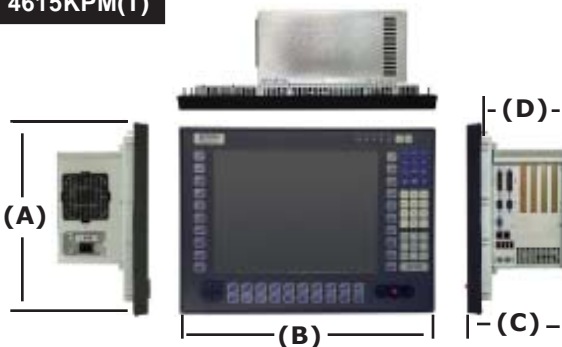


4615 Unit Configuration

Display	15.0" LCD color display, 1024 x 768 (XGA), 300 nits
Operator Input	Analog resistive touchscreen (4615T) Reprogrammable 74-position keypad and industrial mouse (4615KPM(T))
Processors	Intel® Celeron® M 1.31 GHz or optional Pentium M
Preloaded OS	Windows® XP or Windows® 2000 (multi-language)
Expansion	One (8.0" max.) PCI, two (9.0" max.) PCI, and one (9.0" max.) PCI or ISA

PRODUCT DIMENSIONS AND CONFIGURATIONS

1546

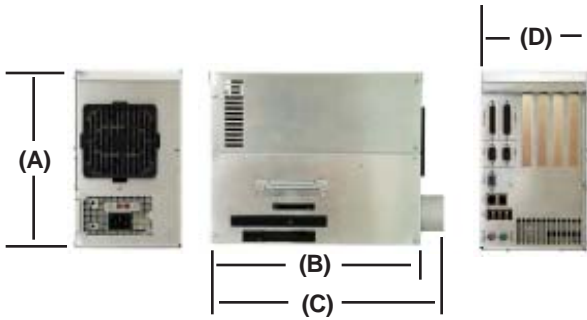

1546 Configurations

Model	1546
Height (A)	9.24" (234.7 mm)
Width (B)	11.47" (291.3 mm)
Width (C)	12.74" (324.9 mm)
Depth (D)	5.75" (146.1 mm)
Weight	13 lbs (7.2 kg)

1546 Unit Dimensions

Model	1546
Processors	Intel® Celeron® M 1.31 GHz or optional Pentium M
Preloaded OS	Windows® XP or Windows® 2000 (multi-language)
Expansion	One (8.0" max.) PCI, two (9.0" max.) PCI, and one (9.0" max.) PCI or ISA

RAID-ENABLED PRODUCT SPECIFICATIONS

Environmental

	Operating	Nonoperating
Thermal	0°C to 50°C	-20°C to 60°C
Humidity	20% to 80% RH, non-condensing	20% to 80% RH, non-condensing
Shock ^a	15g peak acceleration, 11 msec duration	30g peak acceleration, 11 msec duration
Vibration 5-2000 Hz ^a	.006" peak to peak displacement 1.0g maximum acceleration	.015" peak to peak displacement 2.5g maximum acceleration

^a These values are with solid state hard drives, and not rotating media drives.

Electrical

Models	4612KPM / 4615KPM(T) / 1546
Power Supply	250 Watt AC
AC Power	100 - 240 VAC, 50-60 Hz (auto-ranging), 5.0 Amps (maximum) 4612 - 78 Watt nominal power † 4615 - 88 Watt nominal power † 1546 - 74 Watt nominal power †
Power Available for Expansion	+3.3V@4.0A max +5V@4.0A max -5@160mA max -12@03.0A max +12@240mA max

† Nominal power is measured for a base configuration only. Any additional expansion and/or devices will increase the input power required.

RAID-ENABLED PRODUCT RATINGS

4600 Series Compliance

Regulatory Compliance

CE

- EN 55022: Class A
- EN 61000-6-2
- EN 61000-3-2, Class A
- EN 61000-3-3
- IEC 60950-1

FCC

- 47 CFR, Part 15, Class A

Safety Agency Approvals

UL

- UL 508 Listed
- UL 1604 Listed^a

CUL

- CSA-C22.2, #142 Listed
- CSA-C22.2, #213 Listed^a

^a Class I Division 2, Groups A, B, C, D; Class II, Division 2, Groups F and G;
Temp. Code: T6

Front Panel

- NEMA 4/4X/12, IP65



1546 Series Compliance

Regulatory Compliance:

CE

- EN 55022: Class A
- EN 61000-6-2
- EN61000-3-2, Class A
- EN61000-3-3
- IEC 60950-1

FCC

- 47 CFR, Part 15, Class A

Safety Agency Approvals

UL

- UL 508 Listed
- UL 1604 Listed^a


^a Class I Division 2, Groups A, B, C, D; Class II, Division 2, Groups F and G;
Temp. Code: T6




Product certification documentation available at:
www.xycom.com/certifications

RAID-ENABLED PRODUCT MOUNTING


4612T Cutout

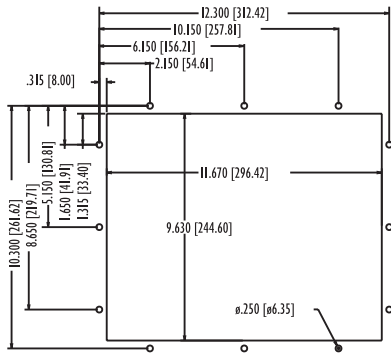


4612KPM(T) Cutout

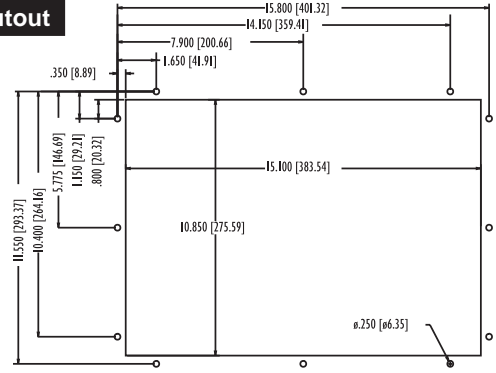


4615T Cutout

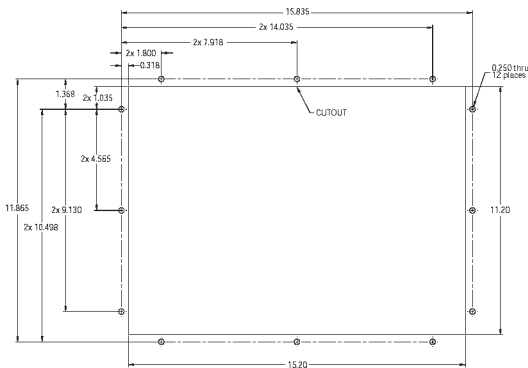


4615KPM(T) Cutout

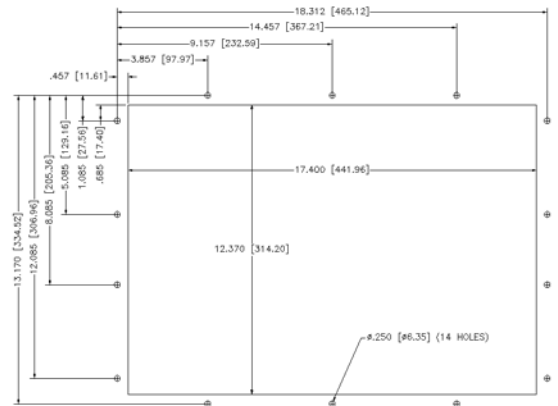

1546 Shelf Mounting

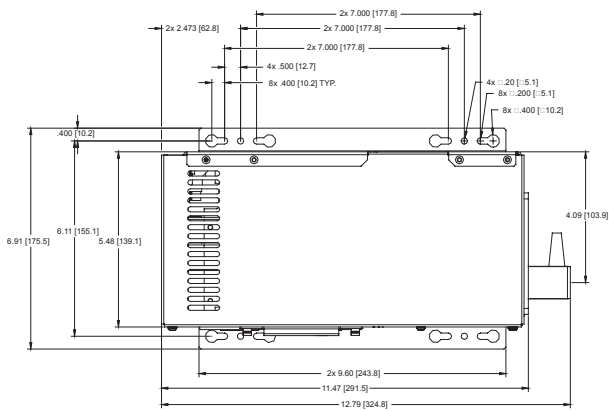

1546 Wall Mounting

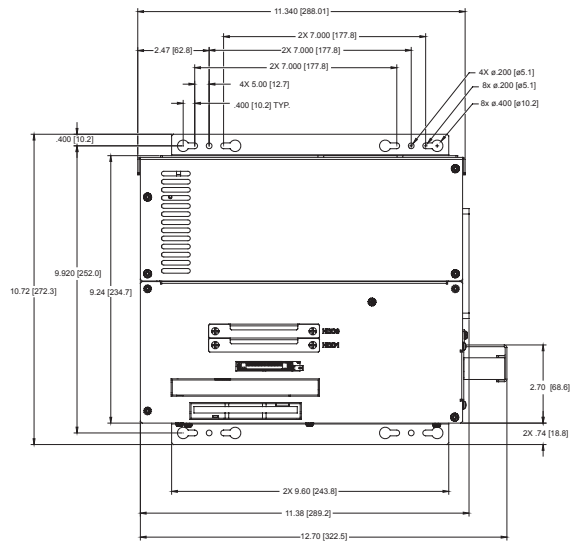

ORDERING INFORMATION

To create an order number, follow the conventions defined by the example order numbers and product configurations.

Example Order Number

Order Number	Description
4612T-1300-512-RAID-CD-XP	RAID-enabled 4612T with 12.1" TFT LCD, Touchscreen front panel, Intel® Celeron® M 1.3 GHz, (512K Cache, 400 MHz bus), 512 MB DRAM, Two Serial ATA 40 GB minimum Hard Drives, Rear Access Type I/II CompactFlash socket and CD-ROM, Windows XP, On-board 10/100 and 10/100/1000 BaseT Ethernet and USB, one (8.0" max.) PCI, two (9.0" max.) PCI, and one (9.0" max.) PCI or ISA available expansion slots.

4612 - - RAID

Display and Operator Input

- T 12" w/ Touchscreen only
- KPM 12" w/ Keypad & Mouse
- KPMT 12" w/ Keypad, Mouse, & Touch

CPU

- 1300 Celeron M 1.3 GHz, 512K Cache, 400 MHz bus
- 2000 Pentium M 2.0 GHz, 2M Cache, 533 MHz bus

DRAM

- 512 512 MB DRAM
- 1000 1 GB DRAM
- 2000 2 GB DRAM

Rotating Media Drives

- CD Rear Access CD-ROM
- Blank No Rear Access CD-ROM
- CDW Rear Access CD-R/W & DVD-Read only
- DVDW Rear Access Read/Write DVD-ROM Drive

Floppy

- Blank No Floppy Installed ^a
- F Rear Access Floppy Installed

Externally Accessible Compact Flash

- Blank Nothing Installed
- 4GCF 4 GB CompactFlash Installed

Operating System

- XP Pre-Activated Windows XP Professional
- 2K Windows 2000 (multi-language)

^a When ordering a unit with no floppy operating system recovery will not be possible without adding an external USB floppy drive.

Important Notice for XP configurations: Certain Microsoft® software product(s) included with this computer may use technological measures for copy protection. IN SUCH EVENT, YOU WILL NOT BE ABLE TO USE THE PRODUCT IF YOU DO NOT FULLY COMPLY WITH THE PRODUCT ACTIVATION PROCEDURES. Product activation procedures and Microsoft's privacy policy will be detailed during initial launch of the product, or upon certain reinstallations of the software product(s) or reconfigurations of this computer, or may be completed by Internet or telephone (toll charges may apply).

Warranty Information

The 4612 series carries a two-year parts & labor warranty.

ORDERING INFORMATION (continued)

Example Order Number

Order Number	Description
4615T-1300-512-RAID-CD-XP	RAID-enabled 4615T with 15.0" TFT LCD, Touchscreen front panel, Intel® Celeron® M 1.3 GHz, (512K Cache, 400 MHz bus), 512 MB DRAM, Two Serial ATA 40 GB minimum Hard Drives, Rear Access Type I/II CompactFlash socket and CD-ROM, Windows XP, On-board 10/100 and 10/100/1000 BaseT Ethernet and USB, one (8.0" max.) PCI, two (9.0" max.) PCI, and one (9.0" max.) PCI or ISA available expansion slots.
4615KPM-1300-512-RAID-CD-XP	

4615 - - RAID

Display and Operator Input

- T 15" w/ Touchscreen only
- KPM 15" w/ Keypad & Mouse
- KPMT 15" w/ Keypad, Mouse, & Touch

CPU

- 1300 Celeron M 1.3 GHz, 512K Cache, 400 MHz bus
- 2000 Pentium M 2.0 GHz, 2M Cache, 533 MHz bus

DRAM

- 512 512 MB DRAM
- 1000 1 GB DRAM
- 2000 2 GB DRAM

Rotating Media Drives

- CD Rear Access CD-ROM
- Blank No Rear Access CD-ROM
- CDW Rear Access CD-R/W & DVD-Read only
- DVDW Rear Access Read/Write DVD-ROM Drive

Floppy

- Blank No Floppy Installed ^a
- F Rear Access Floppy Installed

Externally Accessible Compact Flash

- Blank Nothing Installed
- 4GCF 4 GB CompactFlash Installed

Operating System

- XP Pre-Activated Windows XP Professional
- 2K Windows 2000 (multi-language)

^a When ordering a unit with no floppy operating system recovery will not be possible without adding an external USB floppy drive.

Important Notice for XP configurations: Certain Microsoft® software product(s) included with this computer may use technological measures for copy protection. IN SUCH EVENT, YOU WILL NOT BE ABLE TO USE THE PRODUCT IF YOU DO NOT FULLY COMPLY WITH THE PRODUCT ACTIVATION PROCEDURES. Product activation procedures and Microsoft's privacy policy will be detailed during initial launch of the product, or upon certain reinstallations of the software product(s) or reconfigurations of this computer, or may be completed by Internet or telephone (toll charges may apply).

Warranty Information
The 4615 series carries a two-year parts & labor warranty.

ORDERING INFORMATION (continued)

Example Order Number

Order Number	Description
1546-1300-512-CD-XP	1546 Industrial "Node" PC, Intel® Celeron® M 1.3 GHz CPU (512K Cache, 400 MHz bus), 512MB DRAM, 40 GB minimum Serial ATA Hard Drive, Rear Access Type I/II CompactFlash socket and CD-ROM, Windows XP, On-board 10/100 and 10/100/1000 BaseT Ethernet and USB, one (8.0" max.) PCI, two (9.0" max.) PCI, and one (9.0" max.) PCI or ISA available expansion slots.

1546 - - RAID

CPU	
1300	Celeron M 1.3 GHz, 512K Cache, 400 MHz bus
2000	Pentium M 2.0 GHz, 2M Cache, 533 MHz bus

DRAM	
-512	512 MB DRAM
-1000	1 GB DRAM
-2000	2 GB DRAM

Rotating Media Drives	
-CD	Rear Access CD-ROM <input type="checkbox"/>
Blank	No Rear Access CD-ROM
-CDW	Rear Access CD-R/W & DVD-Read only
-DVDW	Rear Access Read/Write DVD-ROM Drive

Floppy	
Blank	No Floppy Installed ^a
-F	Rear Access Floppy Installed

Externally Accessible Compact Flash	
Blank	Nothing Installed
-4GCF	4 GB CompactFlash Installed

Operating System	
-XP	Pre-Activated Windows XP Professional
-2K	Windows 2000 (multi-language)

^a When ordering a unit with no floppy operating system recovery will not be possible without adding an external USB floppy drive.

Important Notice for XP configurations: Certain Microsoft® software product(s) included with this computer may use technological measures for copy protection. IN SUCH EVENT, YOU WILL NOT BE ABLE TO USE THE PRODUCT IF YOU DO NOT FULLY COMPLY WITH THE PRODUCTACTIVATION PROCEDURES. Product activation procedures and Microsoft's privacy policy will be detailed during initial launch of the product, or upon certain reinstallations of the software product(s) or reconfigurations of this computer, or may be completed by Internet or telephone (toll charges may apply).

Warranty Information

The 4612 series carries a two-year parts & labor warranty.

Xycom Automation
734-429-4971
Fax: 734-429-1010
<http://www.xycom.com>

Customer Support Hotline:
734-944-0482



© 2006 Xycom Automation, LLC. Specifications may change without notice.
Xycom Automation is a trademark of Xycom Automation. Other brand or product names are the property of their respective owners.